

Published in IET Communications
 Received on 10th June 2008
 Revised on 8th September 2008
 doi: 10.1049/iet-com.2008.0369



New achievable rate and a certain capacity result for a stochastic two relay network with no interference

G.A. Hodtani M.R. Aref

Department of Electrical Engineering, Sharif University of Technology, Tehran, Iran
 E-mail: hodtani@yahoo.com

Abstract: Gastpar and Vetterli named the *ad hoc* networks with one randomly selected source-destination pair as relay networks, and they suggested using arbitrary network coding in order to increase the overall efficiency. Here, the relay network is investigated with two relays, no interference and a new achievable rate is obtained using a new network coding (decode-and-broadcast). The obtained achievable rate (i) gives the lower bound for general relay channel, obtained by Cover and El Gamal, but with a slight difference owing to no interference assumption at the receiver, (ii) includes the one relay rates of a two-level relay channel studied by Gupta and Kumar using point-to-point coding, (iii) includes the rates of two-relay Aref network and other special two-relay networks, (iv) meets the max-flow min-cut upper bound under certain additional assumptions resulting in certain capacity theorems that include the related previous capacities, (v) is validated by its consistency with previous results relevant to special cases of broadcast channels.

1 Introduction

Recently there has been much interest in studying relay networks and wireless relay communication scenarios [1, 2]. Wireless networks with base stations (cell networks) are relatively well understood by considering the multiple access and the broadcast channels. However, the networks without base stations (*ad hoc* networks) in which any node can act both as a terminal and as a relay for other transmissions are less well understood and have many open problems. *Ad hoc* networks were studied in [3, 4] as networks having n nodes communicating with each other and multiple source-destination pairs to obtain an achievable rate region using point-to-point coding. In [5] mobile *ad hoc* networks have been studied. In [6], *ad hoc* networks with one randomly selected source-destination pair were named as relay networks. Also, in [6] arbitrary network coding was suggested to increase the overall efficiency and was used to obtain achievable rates and to derive upper bounds from max-flow min-cut theorem. Various problems of wireless *ad hoc* networks have been studied in [7–13].

Here, we consider the relay network introduced in [6] with two relays and no interference. This two-relay network was studied in [14] with deterministic links and in [15] with one random link. Now we study the two-relay network with randomness for all links to obtain a new achievable rate using a new network coding (decode-and-broadcast). In other words, we investigate the two-level relay channel studied in [4, Fig. 1] using a new network coding instead of point-to-point coding. The obtained achievable rate gives the lower bound for the general relay channel obtained by Cover and El Gamal with slight difference due to no interference assumption at the receiver, includes the one relay rates of a two-level relay channel studied by Gupta and Kumar using point-to-point coding, that includes the rate of a two-relay Aref network and other special two-relay networks. This meets the max-flow min-cut upper bound under certain additional assumptions resulting in a certain capacity theorem, which includes the related previous capacities and is validated by its consistency with previous results relevant to special cases of broadcast channels.

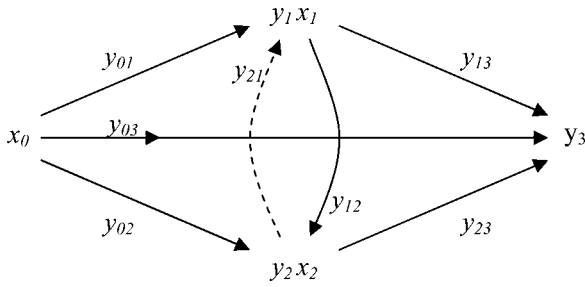


Figure 1 Two-relay network

At first, in this section we recall some definitions, define the network model considered, describe the network coding, remember previous studies of the model and then we list our new results.

1.1 Some definitions

Relay network [6]: A relay network is a wireless network having a one source-destination pair and some relays where the relays act as terminals (transmitters and receivers or cooperative nodes).

Stochastic (deterministic) relay network with no interference [14–16]: Stochastic (deterministic) relay network with no interference is a network where the output of every link is some stochastic (deterministic) function of only the input of that link.

So, a stochastic (deterministic) relay network with no interference is a special case of relay network introduced in [6]. Deterministic relay networks introduced in [14] have been named as Aref networks in [16].

Remarks

1. The assumption of no interference is applicable only for broadcast channels and does not apply to multiple-access channels. For this reason, we will use decode-and-broadcast coding (namely, the source and the relays act as broadcast channels).
2. In [17, 18], the relay networks have been studied with a more general definition of determinism (approximately Gaussian determinism).
3. In deterministic wired network with independent channels [19], we do not have broadcasting while in a stochastic (deterministic) relay network with no interference and in other wireless networks, such as wireless erasure networks [20] we have broadcasting.

1.2 Network model

Here, as mentioned in the introduction, we consider a stochastic two-relay network with no interference (Fig. 1) consisting of one source (x_0), one destination (y_3), two relays (x_1 and x_2) and seven stochastic links: the link between the source and the destination (y_{03}), two links

between the relays (y_{12}, y_{21}), two links between the source and the relays (y_{01}, y_{02}) and two links between the relays and the destination (y_{13}, y_{23}). Actually, we treat a special case of general relay network introduced in [6].

The above two-relay network consists of a source input alphabet \mathcal{X}_0 , relay input alphabets $\mathcal{X}_1, \mathcal{X}_2$ and output alphabets $\mathcal{Y}_{01}, \mathcal{Y}_{02}, \mathcal{Y}_{03}, \mathcal{Y}_{12}, \mathcal{Y}_{21}, \mathcal{Y}_{13}, \mathcal{Y}_{23}$. The network is characterised by the probability distribution $p(y_{01}, y_{02}, y_{03}, y_{12}, y_{21}, y_{13}, y_{23} | x_0, x_1, x_2) = p(\cdot | \cdot)$, where x_0, x_1 and x_2 indicate the source input, the first-relay input and the second-relay input, respectively and $y_{01}, y_{02}, y_{03}, y_{12}, y_{21}, y_{13}, y_{23}$ indicate the outputs.

We assume that the network is memoryless, that is, the present outputs depend on the messages, the previous inputs, and the previous outputs only through the present inputs.

We use \underline{x} and \underline{y} to represent the input vectors (x_1, \dots, x_n) and the output vectors (y_1, \dots, y_n) , respectively, such that in Fig. 1 $\underline{y}_1 = (y_{01}, y_{21})$, $\underline{y}_2 = (y_{02}, y_{12})$, $\underline{y}_3 = (y_{03}, y_{13}, y_{23})$, $\underline{x}_0 = (x_{01}, \dots, x_{0n})$, $\underline{x}_1 = (x_{11}, \dots, x_{1n})$, $\underline{x}_2 = (x_{21}, \dots, x_{2n})$ and as in general multi-terminal networks [21, Chapter 14.10] $x_{0i} = f_{0i}(w)$, $x_{1i} = f_{1i}(y_1^{i-1}) = f_{1i}(y_{11}, \dots, y_{1i-1})$ and $x_{2i} = f_{2i}(y_2^{i-1}) = f_{2i}(y_{22}, \dots, y_{2i-1})$, $i = 1, \dots, n$.

The message w with the rate R is the new message to be sent in each transmission block. The destination computes its message estimate \hat{w} as a function of \underline{y}_3 . Suppose that w has B_w bits. The capacity \mathcal{C} is the supremum of rates $R = B_w/n$ at which the destination's message estimate \hat{w} can be made to satisfy $\Pr(\hat{w} \neq w) < \epsilon$ for any positive ϵ . An upper bound for capacity is the max-flow min-cut upper bound [21, Theorem 14.10.1].

Fig. 2 illustrates the network model where the message w is sent and ultimately \hat{w} is estimated at the receiver.

1.3 Network coding (decode-and-broadcast)

We apply a new technique (decode-and-broadcast) established from the combination of superposition encoding [22–25] and random binning [26–29]. This technique is a generalisation of the coding scheme used in [25, Theorem 7, special case by $\hat{Y}_1 = \emptyset, V = X_2 \rightarrow X_1$] to two relays, but with the addition of the cooperation

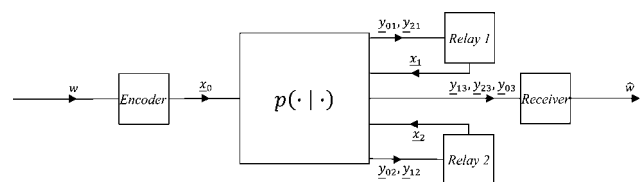


Figure 2 Network model

between the relays (or adding the links y_{12}, y_{21}). Therefore at first we split the message w (as in [25], Theorem 7) into $w = (w_{01}, w_{02}, w_{03})$ and second we allow the relays to broadcast for cooperating with each other and the receiver.

Suppose that $B - 2$ block messages $w_1, w_2, \dots, w_i, \dots, w_{B-2}$, each block i of nR bits and the message $w_i = (w_{01i}, w_{02i}, w_{03i})$, are transmitted from the source x_0 to the destination y_3 during nB transmissions. Therefore the total effective single rate R from the source x_0 to the destination y_3 in Fig. 1 equals $R(B - 2)/B \xrightarrow{B \rightarrow \infty} R = R_{01} + R_{02} + R_{03}$. Also, the same codebook is used in each block of transmission.

The assumption of no interference has been applied in the literature for reliable communication channels between nodes in models of *ad hoc* wireless network based on the geometric disc abstraction. For example, in [12] the outer bounds for the capacity have been determined with this assumption. Here we apply this assumption to the broadcast channels in the network (Fig. 1). So, we use decode and broadcast coding, that is, the relays (x_1 and x_2) act as transmitters for the broadcast channels and they broadcast what they decode from the source and the messages to each other, to the receiver and each other through x_1 and x_2 . In other words, two relays while cooperating with each other, cooperate with the transmitter to increase the total rate of transmission. The source (x_0) also acts as a transmitter for the receivers y_{01} and y_{02} , and meanwhile it superimposes its message w_{03} intended only to the destination y_3 on its messages w_{01}, w_{02} intended for $y_{01}y_{02}$. The messages w_{01}, w_{02} are decoded by the first relay and the second relay, respectively, and then by the receiver, but the message w_{03} is decoded only by the receiver (y_3).

For broadcasting source and relays, it is necessary to use auxiliary random variables u_1, v_1, u_2, v_2, u_0 and v_0 in relation with input random variables x_0, x_1 and x_2 and to choose an appropriate joint distribution (distribution (A) in the main theorem, Section 2).

1.4 Previous studies of the network model in Fig. 1

The network in Fig. 1 has been studied in:

D₁. [14] when all of the links are deterministic and its capacity has been determined using deterministic broadcast channels [30, 31] and max-flow min-cut upper bound [21],

D₂. [4] as a two-level relay channel by point-to-point coding without the link y_{21} in Fig. 1,

D₃. [6] with additive white Gaussian regime,

D₄. [32] in a diamond topology, without the links y_{12}, y_{21}, y_{03} .

1.5 New results

The new achievable rate we have obtained (Section 2, main theorem) for the two-relay network in Fig. 1:

E₁. Gives a lower bound for the general relay channel the same as obtained by Cover and El Gamal [25, Theorem 7, special case], but with a slight difference due to no interference assumption at the receiver and includes the one relay rates of a two-level relay channel studied by Gupta and Kumar using point-to-point coding,

E₂. Includes the rate of deterministic two-relay network [14] and other special two-relay networks,

E₃. Meets max-flow min-cut upper bound [21] under additional assumptions and

E₄. Is validated by its consistency with previous results related to special cases of broadcast channels [33, 34].

The remainder of the paper is organised as follows. In Section 2, the main theorem is stated. In Section 3, the main theorem's corollaries are derived and explained. In Section 4, we prove the theorems and Section 5 prepares a conclusion.

2 Main theorem

Consider again the stochastic two-relay network with no interference (Fig. 1) where the source (x_0) and the relays (x_1 and x_2) act as broadcast channels and all of the links are stochastic.

Regarding the network (Fig. 1), for every cut-set bound achieving capacity theorem, the converse can be proved from general upper-bound at least under special cases and only the achievability proof is of importance.

Therefore by using binning method [26–29], superposition encoding [22–25] and combining all of the known coding techniques, we establish the decode-and-broadcast strategy and in order to apply this strategy we choose the appropriate distribution (the distribution (A) in the main theorem). By noting the fact that the new message to be sent to the receiver in block i is $w_i = (w_{01i}, w_{02i}, w_{03i})$ with the rate $R = R_{01} + R_{02} + R_{03}$, we first introduce an achievable rate (main theorem) for R and then derive its special cases, for example some certain capacity theorems as in Section 3.

Main Theorem: For the stochastic network (Fig. 1) with no interference, the following rate is achievable

$$R^* = \sup \min \{R_{c1}^*, R_{c2}^*, R_{c3}^*, R_{c4}^*\}$$

where $R_{c1}^* = I(U_0; Y_{01}|X_1) + I(V_2; Y_{23}) + I(U_2; Y_{21}) - I(U_2; V_2) + H(Y_{03}Y_{13}Y_{23}|X_1X_2) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2)$, $R_{c2}^* =$

$I(V_0; Y_{02}|X_2) + I(V_1; Y_{13}) + I(U_1; Y_{12}) - I(U_1; V_1) + H(Y_{03} Y_{13} Y_{23}|X_1 X_2) - H(Y_{03} Y_{13} Y_{23}|X_0 X_1 X_2)$, $R_3^* = I(V_1; Y_{13}) + I(V_2; Y_{23}) + H(Y_{03} Y_{13} Y_{23} | X_1 X_2) - H(Y_{03} Y_{13} Y_{23} | X_0 X_1 X_2)$, $R_4^* = H(Y_{03} Y_{13} Y_{23} V_0 U_0 | X_1 X_2) - H(Y_{03} Y_{13} Y_{23} | X_0 X_1 X_2) - H(U_0 | X_1 Y_{01}) - H(V_0 | X_2 Y_{02})$, and supremum is taken over the joint distribution of the form (as shown at the bottom of the page)

A – 1 and A – 2 represent input and random output distributions, respectively. A – 1 satisfies

$$\begin{aligned} X_2 \rightarrow X_1 \rightarrow U_0, \quad U_0 X_1 \rightarrow X_2 \rightarrow V_0, \\ X_1 U_1 V_1 \rightarrow U_2 V_2 \rightarrow X_2 \end{aligned} \tag{B}$$

Proof: See Section 4.

Cut-set interpretation of the rates R_i^* , $i = 1, 2, 3, 4$ in R^* : $R_{c_1}^*$, $R_{c_2}^*$, $R_{c_3}^*$, $R_{c_4}^*$ are the achievable rates through the cut-sets $(y_{23}, y_{21}, y_{03}, y_{01})$, $(y_{13}, y_{12}, y_{03}, y_{02})$, (y_{13}, y_{23}, y_{03}) , (y_{01}, y_{02}, y_{03}) in Fig. 1, respectively.

3 Main theorem’s corollaries

Now, we give some of the main theorem’s corollaries (three corollaries).

Corollary 1: A lower bound for general relay channel and about the two-level relay channel.

A lower bound for general relay channel: By $Y_{02} = X_2 = Y_{12} = Y_{21} = Y_{23} = \emptyset$, Fig. 1 reduces to a relay channel [25] and from $R^*(V_0 = \emptyset, U_1 = U_2 = V_2 = \emptyset, V_1 = X_1)$, we obtain the following lower bound

$$R_1 = \sup_{p(x_0 x_1 u_0)} \min \left\{ \underbrace{I(U_0; Y_{01}|X_1) + I(X_0; Y_{03} Y_{13}|X_1 U_0)}_{(1)}, \underbrace{I(X_1; Y_{13}) + I(X_0; Y_{03} Y_{13}|X_1)}_{(2)} \right\}$$

where (1) is the minimum of the first and the fourth terms in $R^*(U_0 \rightarrow X_0 X_1 X_2 \rightarrow Y_{03} Y_{13} Y_{23}$ in A – 2) and (2) is obtained from the second or the third terms in R^* .

R_1 is slightly different, due to no interference assumption at the receiver, from the lower bound below [25, Theorem 7, $\hat{Y}_1 = \emptyset, V = X_2 \rightarrow X_1, U \rightarrow U_0 X_1, Y_1 \rightarrow Y_{01}, Y =$

$(Y_{03} Y_{13})$]:

$$R_2 = \sup_{p(x_0 x_1 u_0)} \min \left\{ \underbrace{I(U_0; Y_{01}|X_1) + I(X_0; Y_{03} Y_{13}|X_1 U_0)}_{(3)}, \underbrace{\times I(X_1; X_1; Y_{03} Y_{13})}_{(4)} \right\}$$

where (1) = (3) and (2) < (4).

Remarks

(i) A special case of our main theorem ($Y_{12} = Y_{21} = \emptyset$) is a generalisation of R_1 to two relays. In other words, we have generalised the lower bound R_1 to two relays, but with the addition of the cooperation between the relays by the links y_{12}, y_{21} .

(ii) R_1 gives the capacity-defining rates of the relay channels with known capacity (degraded: $U_0 = X_0$, reversely degraded: $U_0 = \emptyset$, full feedback: $U_0 = X_0$ and $Y_{03} Y_{13} \rightarrow Y_{03} Y_{13} Y_{01}$, semi-deterministic: $U_0 = Y_{01}$ and orthogonal relay channels[35]: $U_0 = X_R, X_0 = (X_R X_D)$), but with no interference at the receiver. Therefore our main theorem is a generalisation of these channels to two relays, but with additional links y_{12}, y_{21} and no interference condition at the receiver.

(iii) $R_1 = R_2$ when the no interference condition ($X_1 \rightarrow Y_{13} \rightarrow Y_{03}$) is applied. *About the two-level relay channel [4]:* Point-to-point coding used in [4] for the two-level relay channel gives the rates of degraded and reversely degraded relay channels for a relay channel, but our new coding strategy gives a general lower bound for it.

Corollary 2: (The rate of two-relay Aref network and the rate regions for special broadcast channels): We can validate the main theorem by its consistency with previous results in [14, 26, 34, 36, 37]. Here we choose the relevancy to two-relay Aref network [14] and special broadcast channels [26, 34].

First, we assume that all of the links but y_{03} in Fig. 1 are deterministic and determine the following achievable rate R_1^* (Theorem 1). Then we derive from R_1^* the rate of two-relay Aref network and explain its consistency with known results.

Theorem 1: For the network (Fig. 1) with no interference, random y_{03} and assuming all other links to be deterministic,

$$\begin{aligned} p(u_1 v_1 u_2 v_2 u_0 v_0 x_0 x_1 x_2, y_{03} y_{13} y_{23} y_{12} y_{21} y_{01} y_{02}) \\ = \underbrace{p(u_1 v_1 u_2 v_2) p(x_1 | u_1 v_1) p(x_2 | u_2 v_2) p(u_0 | x_1) p(v_0 | x_2) p(x_0 | u_0 v_0 x_1 x_2)}_{A-1} \underbrace{p(y_{03} y_{13} y_{23} y_{12} y_{21} y_{01} y_{02} | x_0 x_1 x_2)}_{A-2} \end{aligned} \tag{A}$$

the following rate is achievable

$$R_1^* = \sup \min \left\{ \begin{array}{l} H(Y_{23}Y_{21}) + H(Y_{01}|X_1) + H(Y_{03}|X_1X_2) \\ -H(Y_{03}|X_0X_1X_2), \\ H(Y_{13}Y_{12}) + H(Y_{02}|X_2) + H(Y_{03}|X_1X_2) \\ -H(Y_{03}|X_0X_1X_2), \\ H(Y_{13}) + H(Y_{23}) + H(Y_{03}|X_1X_2) - H(Y_{03}|X_0X_1X_2), \\ H(Y_{01}Y_{02}Y_{03}|X_1X_2) - H(Y_{03}|X_0X_1X_2) \end{array} \right\}$$

where $y_{01} = f_{01}(x_0, x_1)$, $y_{02} = f_{02}(x_0, x_2)$, $y_{12} = f_{12}(x_1)$, $y_{21} = f_{21}(x_2)$, $y_{13} = f_{13}(x_1)$, $y_{23} = f_{23}(x_2)$, and supremum is taken over the joint distribution of the form: (as shown at the bottom of the page)

$A_1 - 1$ and $A_1 - 2$ represent equivalent input and random output distributions, respectively. $A_1 - 1$ satisfies

$$\begin{array}{l} X_2 \rightarrow X_1 \rightarrow Y_{01}, \quad Y_{01}X_1 \rightarrow X_2 \rightarrow Y_{02}, \\ X_1Y_{12}Y_{13} \rightarrow Y_{21}Y_{23} \rightarrow X_2 \end{array} \quad (B_1)$$

and the distribution (A_1) has been obtained from the distribution (A) in the main theorem by $u_1 = y_{12}$, $v_1 = y_{13}$, $u_2 = y_{21}$, $v_2 = y_{23}$, $u_0 = y_{01}$, $v_0 = y_{02}$ and $y_{01} = f_{01}(x_0, x_1)$, $y_{02} = f_{02}(x_0, x_2)$.

Proof: See Section 4.

Special cases of theorem 1:

(a) *The rate of two-relay Aref network [14]:* If we consider the network in Fig. 1 with $y_{01} = f_{01}(x_0, x_1)$, $y_{02} = f_{02}(x_0, x_2)$, $y_{12} = f_{12}(x_1)$, $y_{21} = f_{21}(x_2)$, $y_{13} = f_{13}(x_1)$, $y_{23} = f_{23}(x_2)$ and $y_{03} = f_{03}(x_0)$, we have the distribution

$$p(x_0x_1x_2y_{01}y_{02}) = (A_1) = p(x_1x_2)p(x_0y_{01}y_{02}|x_1x_2) \quad (C)$$

that is, (B_1) conditions hold and the inputs are dependent, however, the dependence of x_0 on x_1x_2 is through $y_{01}y_{02}$. If we change $y_{01} = f_{01}(x_0x_1)$, $y_{02} = f_{02}(x_0x_2)$ into $y_{01} = f_{01}(x_0)$, $y_{02} = f_{02}(x_0)$, then, all links become deterministic as in [14, Section 3.5], however, according to (C) the inputs still remain dependent and (B_1) conditions hold. Thus, Theorem 1 for two-relay Aref network [14] with

dependent inputs and (B_1) conditions is as follows

$$R_a^* = \sup \min \left\{ \begin{array}{l} H(Y_{23}Y_{21}) + H(Y_{01}|X_1) + H(Y_{03}|X_1X_2), \\ H(Y_{13}Y_{12}) + H(Y_{02}|X_2) + H(Y_{03}|X_1X_2), \\ H(Y_{13}) + H(Y_{23}) + H(Y_{03}|X_1X_2), \\ H(Y_{01}Y_{02}Y_{03}|X_1X_2) \end{array} \right\}$$

(b) *We can validate the theorem 1 by its consistency with the previous results [26, 33, 34]:* If $X_1 = X_2 = (Y_{02} =) Y_{23} = Y_{13} = Y_{21} = Y_{12} = \emptyset$, then Fig. 1 is reduced to broadcast channels with degraded messages, two (three) components and one random component [26, 33, 34] the achievable rate regions of which can be established from the terms in Theorem 1 (the details are omitted).

Corollary 3: Certain capacity result: The rate R_1^* in Theorem 1 coincides with max-flow min-cut upper bound under additional assumptions and results in a certain capacity theorem. More generally, in the main theorem, if we impose the condition $(X_1X_2 \rightarrow Y_{13}Y_{23} \rightarrow Y_{03}, (co-1))$ on the random channels distribution $A - 2$, we will have the following capacity theorem for the network with three random links (Imposing this condition on A , adds the accompanying condition: $(Y_{01}Y_{02} \rightarrow X_1X_2 \rightarrow Y_{03}Y_{13}Y_{23}, (co-2))$. Of course, the conditions $(co-1, 2)$ can be replaced by equivalent conditions resulting from the no interference assumption.

Theorem 2: For the special case $(X_1X_2 \rightarrow Y_{13}Y_{23} \rightarrow Y_{03})$ the capacity of the network (Fig. 1, $Y_{12} = Y_{21} = \emptyset$) with no interference, random y_{13} , y_{23} , y_{03} and assuming other links to be deterministic, is given by

$$C = \sup \min \left\{ \begin{array}{l} H(Y_{23}) + H(Y_{01}|X_1) + H(Y_{13}|X_1) + H(Y_{03}|Y_{13}Y_{23}) \\ -H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2), \\ H(Y_{13}) + H(Y_{02}|X_2) + H(Y_{23}|X_2) + H(Y_{03}|Y_{13}Y_{23}) \\ -H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2), \\ H(Y_{13}) + H(Y_{23}) + H(Y_{03}|Y_{13}Y_{23}) \\ -H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2), \\ H(Y_{01}Y_{02}Y_{03}Y_{13}Y_{23}|X_1X_2) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2) \end{array} \right\}$$

where $y_{01} = f_{01}(x_0, x_1)$, $y_{02} = f_{02}(x_0, x_2)$, and supremum is

$$\begin{aligned} & p(x_0x_1x_2y_{01}y_{02}y_{03}y_{12}y_{21}y_{13}y_{23}) \\ & = \underbrace{p(y_{12}y_{13}y_{23}y_{21})}_{A_1-1} \underbrace{p(x_1|y_{12}y_{13})p(x_2|y_{23}y_{21})p(y_{01}|x_1)p(y_{02}|x_2)p(x_0|y_{01}y_{02}x_1x_2)}_{A_1-2} p(y_{03}|x_0x_1x_2) \end{aligned} \quad (A_1)$$

taken over the joint distribution of the form

$$\begin{aligned}
 & p(x_0 x_1 x_2 y_{01} y_{02} y_{03} y_{13} y_{23}) \\
 &= \underbrace{p(x_1 x_2) p(y_{01} | x_1) p(y_{02} | x_2) p(x_0 | y_{01} y_{02} x_1 x_2)}_{A_2 - 1} \\
 & \quad \times \underbrace{p(y_{03} y_{13} y_{23} | x_0 x_1 x_2)}_{A_2 - 2} \tag{A_2}
 \end{aligned}$$

$A_2 - 1$ and $A_2 - 2$ represent equivalent input and random output distributions, respectively. $A_2 - 1$ satisfies

$$X_2 \rightarrow X_1 \rightarrow Y_{01}, Y_{01} X_1 \rightarrow X_2 \rightarrow Y_{02} \tag{B_2}$$

Proof: See Section 4.

Special cases of Theorem 2:

(a) When all of the links are deterministic, using (co-1, 2) and the independence of the inputs, Theorem 2 gives the capacity of deterministic two-relay network as in [14, Section 3.5 by Y_{21} or $Y_{12} = \emptyset$].

(b) If $X_2 = Y_{02} = Y_{23} = \emptyset$, it is readily obtained that Theorem 2 gives the capacity of semi-deterministic relay channel in [38].

4 Proof of theorems

4.1 Proof of the main theorem

4.1.1 Outline of the proof: As mentioned and explained in Sections 1.2 and 1.3 in the introduction, we apply decode-and-broadcast strategy. The source x_0 sends the message splits w_{01} , w_{02} (sends the corresponding sequences located in bins of w_{01} , w_{02}) to the first relay and the second relay, respectively and meanwhile superimposes the message split w_{03} intended for only the receiver over w_{01} , w_{02} . The relays decode what they receive from the source and from each other and broadcast the result to the receiver and to each other in an appropriate way. The receiver decodes the messages first from the relays and then from the source as will be explained in detail below.

4.2 Random codebook generation

The input probability distribution, network transition distribution $p(\cdot | \cdot)$, $\varepsilon > 0$ and $n \geq 1$ are given. Fix the joint distribution (A) in the main Theorem. The idea is to send $w = (w_{03}, w_{01}, w_{02})$ to the receiver.

(G1-a) Generate $2^{nI(U_1; Y_{12})}$ ε -typical independent and identically distribution (i.i.d.) n -sequences $\underline{u}_1 \in \mathcal{U}_1^n$, each with probability

$$p(\underline{u}_1) = \begin{cases} \frac{1}{\|\mathcal{A}_\varepsilon^n(\mathcal{U}_1)\|}, & \underline{u}_1 \in \mathcal{A}_\varepsilon^n(\mathcal{U}_1) \\ 0, & \text{other} \end{cases}$$

where $\|\cdot\|$ indicates the cardinality. Throw randomly the sequences \underline{u}_1 into $2^{nR_{12}}$ bins; index the bins $B_{m_{12}}$, $m_{12} \in [1, 2^{nR_{12}}]$, $R_{12} < I(U_1; Y_{12})$.

(G1-b) Generate $2^{nI(V_1; Y_{13})}$ ε -typical i.i.d. n -sequences $\underline{v}_1 \in \mathcal{V}_1^n$, each with probability

$$p(\underline{v}_1) = \begin{cases} \frac{1}{\|\mathcal{A}_\varepsilon^n(\mathcal{V}_1)\|}, & \underline{v}_1 \in \mathcal{A}_\varepsilon^n(\mathcal{V}_1) \\ 0, & \text{other} \end{cases}$$

and throw them randomly into $2^{nR_{13}}$ bins; index the bins $B_{m_{13}}$, $m_{13} \in [1, 2^{nR_{13}}]$, $R_{13} < I(V_1; Y_{13})$.

(G1-c) We can find jointly ε -typical pairs $(\underline{u}_1, \underline{v}_1)$ such that: $(\underline{u}_1(k_1), \underline{v}_1(j_1)) \in (B_{m_{12}} \times B_{m_{13}}) \cap \mathcal{A}_\varepsilon^n(\overline{U_1, V_1})$, $k_1 \in B_{m_{12}}$, $j_1 \in B_{m_{13}}$; then for each jointly ε -typical pair $(\underline{u}_1, \underline{v}_1)$, generate one ε -typical conditionally independent n -sequence $\underline{x}_1 \in \mathcal{X}_1^n$ that is jointly ε -typical with that pair, with probability

$$p(\underline{x}_1) = \begin{cases} \frac{1}{\|\mathcal{A}_\varepsilon^n(\mathcal{X}_1 | \underline{u}_1 \underline{v}_1)\|}, & \underline{x}_1 \in \mathcal{A}_\varepsilon^n(\mathcal{X}_1 | \underline{u}_1 \underline{v}_1) \\ 0, & \text{other} \end{cases}$$

and index it as $\underline{x}_1(m_{12}, m_{13}) = \underline{x}_1(s_1)$, $R_{12} + R_{13} < I(U_1; Y_{12}) + I(V_1; Y_{13}) - I(U_1; V_1)$.

Now, we state briefly the remaining steps of codebook generation and also random partitioning.

(G2-a, b, c) Generate similarly n -sequences $\underline{u}_2, \underline{v}_2$, with the bins of $m_{21} \in 2^{nR_{21}}$, $m_{23} \in 2^{nR_{23}}$, respectively and $\underline{x}_2(m_{21}, m_{23}) = \underline{x}_2(s_2)$, $R_{21} < I(U_2; Y_{21})$, $R_{23} < I(V_2; Y_{23})$, $R_{21} + R_{23} < I(U_2; Y_{21}) + I(V_2; Y_{23}) - I(U_2; V_2)$

(G3-a, b, c) Generate, for each $\underline{x}_1(m_{12}, m_{13}) = \underline{x}_1(s_1)$, $2^{nI(U_0; Y_{01} | X_1)} \underline{u}_0$; for each $\underline{x}_2(m_{21}, m_{23}) = \underline{x}_2(s_2)$, $2^{nI(V_0; Y_{02} | X_2)} \underline{v}_0$ with the bins of $w_{01} \in 2^{nR_{01}}$, $w_{02} \in 2^{nR_{02}}$, respectively, $R_{01} < I(U_0; Y_{01} | X_1)$, $R_{02} < I(V_0; Y_{02} | X_2)$; for each jointly ε -typical pair $(\underline{u}_0, \underline{v}_0)$ (the total number of these pairs is $2^{n\hat{R}}$, $\hat{R} = H(U_0 V_0 | X_1 X_2) - H(U_0 | X_1 Y_{01}) - H(V_0 | X_2 Y_{02}) > R_{01} + R_{02}$) $2^{nR_{03}} \underline{x}_0(w_{03} | w_{01} w_{02} s_1 s_2)$.

4.3 Random partitions

Randomly partition \underline{u}_0 sequences into $2^{nR_{12}} \times 2^{n\hat{R}_1}$, \underline{v}_0 sequences into $2^{nR_{21}} \times 2^{n\hat{R}_2}$, $(\underline{u}_0, \underline{v}_0)$ pairs into $2^{n(R_{01} + R_{02})}$ disjoint cells; $\hat{R}_1 = R_{01} - R_{12}$, $\hat{R}_2 = R_{02} - R_{21}$. Therefore $\forall \underline{u}_0 \in B_{w_{01}} \rightarrow w_{01} \equiv (s_1, m_{12})$, $s_1 \in [1, 2^{n\hat{R}_1}]$ and not vice versa. Similarly, $\forall \underline{v}_0 \in B_{w_{02}} \rightarrow w_{02} \equiv (s_2, m_{21})$, $s_2 \in [1, 2^{n\hat{R}_2}]$ and not vice versa. And also, $m_{13} \equiv (s_1, u_{12})$, $s_1 \in [1, 2^{nR_{13}}]$, $u_{21} \in [1, 2^{nR_{u_{12}}}]$, $R_{13} = \hat{R}_1 + R_{u_{12}}$, $R_{u_{12}} = \alpha(R_{12} + R_{21})$, $0 \leq \alpha \leq 1$, $m_{23} \equiv (s_2, u_{21})$, $s_2 \in [1, 2^{nR_{23}}]$, $u_{21} \in [1, 2^{nR_{u_{21}}}]$, $R_{23} = \hat{R}_2 + R_{u_{21}}$, $R_{u_{21}} = \bar{\alpha}(R_{21} + R_{12})$, $\bar{\alpha} = 1 - \alpha$, $(u_{12}, u_{21}) = (m_{12}, m_{21})$.

The Figs. 3a and 3b illustrate the above partitions of $[1, 2^{nI(U_0; Y_{01} | X_1)}]$ and $[1, 2^{nI(V_0; Y_{02} | X_2)}]$

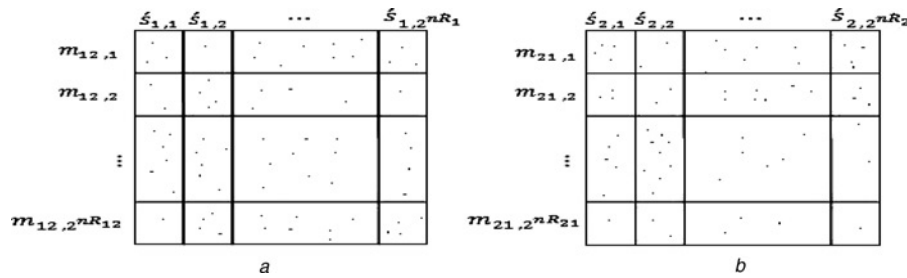


Figure 3 Random partitions

a u_0 Sequences
b v_0 Sequences

4.4 Encoding

Let $w_i = (w_{03,i}, w_{01,i}, w_{02,i})$ be the message to be sent in block i and assume that at the end of block $i - 1$: The first relay has decoded $w_{01,i-1}, m_{21,i-1}$ and knows $m_{12,i-1}$. The second relay has decoded $w_{02,i-1}, m_{12,i-1}$ and knows $m_{21,i-1}$. Therefore either relays know $(m_{12,i-1}, m_{21,i-1})$ and can send this common information to the receiver time-sharingly, that is, the first relay sends $u_{12,i}$ and the second relay sends $u_{21,i}$, thereby, the receiver can decode $u_{12,i}, u_{21,i} = (m_{12,i-1}, m_{21,i-1}), R_{u_{12}} = \alpha(R_{12} + R_{21}), 0 \leq \alpha \leq 1, R_{u_{21}} = \bar{\alpha}(R_{21} + R_{12}), \bar{\alpha} = 1 - \alpha$.

Hence, at the beginning of block i : The first relay sends $x_1(m_{12,i}, m_{13,i}) = x_1(s_{1,i})$, the second relay sends $x_2(m_{21,i}, m_{23,i}) = x_2(s_{2,i})$, the transmitter sends $x_0(w_{03,i}, w_{01,i}, w_{02,i}, s_{1,i}, s_{2,i})$.

4.4.1 Decoding and probability of error analysis:

We defer the details of decoding and probability of error analysis to the Appendix. The analysis shows that if the rate R^* is as in the statement of the main theorem, the reliable communication is possible.

4.5 Proof of Theorem 1

Assuming that the transmitter knows the first symbols of x_1 and x_2 sequences and noting the deterministic functions: $y_{01i} = f_{01}(x_{0i}, x_{1i}), y_{02i} = f_{02}(x_{0i}, x_{2i}), y_{12i} = f_{12}(x_{1i}), y_{21i} = f_{21}(x_{2i}), y_{13i} = f_{13}(x_{1i}), y_{23i} = f_{23}(x_{2i}), x_{1i} = f_{1i}(y_{01}^{i-1}, y_{21}^{i-1}) = f_{1i}(y_{011}, y_{012}, \dots, y_{01,i-1}; y_{211}, \dots, y_{21,i-1}), x_{2i} = f_{2i}(y_{02}^{i-1}, y_{12}^{i-1}) = f_{2i}(y_{021}, \dots, y_{02,i-1}; y_{121}, \dots, y_{12,i-1})$ $i = 1, \dots, n$, we conclude that the transmitter knows $y_{01}, y_{02}, y_{12}, y_{21}, y_{13}$ and y_{23} , hence, these sequences can be generated at the transmitter or can be treated as equivalent input random variables. Therefore, by putting $U_0 = Y_{01}, V_0 = Y_{02}, U_2 = Y_{21}, U_1 = Y_{12}, V_2 = Y_{23}, V_1 = Y_{13}$ in the main theorem ([26, Theorem 3], [30, 31]) and noting deterministic functions, R_1^* is obtained from R^* . \square

4.6 Proof of Theorem 2

4.6.1 Achievability: As explained in the proof of Theorem 1, in this case, we can put in the main theorem

$U_0 = Y_{01}, V_0 = Y_{02}, V_2 = X_2, V_1 = X_1, Y_{12} = Y_{21} = U_1 = U_2 = \emptyset$, and have

(i) The first term in $R^* \rightarrow$

$$H(Y_{01}|X_1) + H(Y_{23}) - H(Y_{23}|X_2) + H(Y_{03}Y_{13}Y_{23}|X_1X_2) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2) \stackrel{e}{=} H(Y_{01}|X_1) + H(Y_{23}) + H(Y_{13}|X_1) + H(Y_{03}|Y_{13}Y_{23}) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2),$$

(ii) The second term $R^* \xrightarrow{f} H(Y_{02}|X_2) + H(Y_{13}) + H(Y_{23}|X_2) + H(Y_{03}|Y_{13}Y_{23}) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2)$,

(iii) The third term in $R^* \xrightarrow{g} H(Y_{13} + H(Y_{23}) + H(Y_{03}|Y_{13}Y_{23}) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2)$,

(iv) The fourth term in $R^* \xrightarrow{h} H(Y_{03}Y_{13}Y_{23}Y_{01}Y_{02}|X_1X_2) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2)$,

where e, f and g follow from the intropy relations, the conditional independence of $Y_{13} Y_{23}$ and the assumption $X_1X_2 \rightarrow Y_{13}Y_{23} \rightarrow Y_{03}$ in Theorem 2, and h follows from $U_0 = Y_{01} = f_{01}(X_0X_1)$ and $V_0 = Y_{02} = f_{02}(X_0X_2)$.

4.6.2 Converse: Using max flow-min cut upper bound in [21] for Fig. 1 and (a) entropy and information relations $(H(X, Y) = H(X) + H(Y|X), H(A|B, C) \leq H(A|B), I(X; Y) = H(Y) - H(Y|X))$, (b) deterministic functions $y_{01} = f_{01}(x_0x_1), y_{02} = f_{02}(x_0x_2)$, we can prove:

(i) $I(X_0X_2; Y_{01}Y_{03}Y_{23}Y_{13}|X_1) \stackrel{(a),(b)}{=} \dots \stackrel{(a)}{\leq} H(Y_{01} | X_1) + H(Y_{23}) + H(Y_{13}|X_1) + H(Y_{03}|Y_{13}Y_{23}) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2)$.

Similarly, the other three conditions are proved (for brevity, the details are omitted):

(ii) $I(X_0 X_1; Y_{02} Y_{03} Y_{13} Y_{23} | X_2) \leq \dots = H(Y_{13}) + H(Y_{02}|X_2) + H(Y_{23}|X_2) + H(Y_{03}|Y_{13}Y_{23}) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2)$,

(iii) $I(X_0X_1X_2; Y_{03}Y_{13}Y_{23}) = \dots \leq H(Y_{13}) + H(Y_{23}) + H(Y_{03}|Y_{13}Y_{23}) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2)$,

$$(iv) I(X_0; Y_{01}Y_{03}Y_{02}Y_{13}Y_{23}|X_1X_2) = \dots = H(Y_{01}Y_{02}Y_{03}Y_{13}Y_{23}|X_1X_2) - H(Y_{03}Y_{13}Y_{23}|X_0X_1X_2).$$

The above proof completes the converse. \square

5 Conclusion

A new achievable rate as a main theorem for a stochastic two-relay network with no interference was established which gives the lower bound for the general relay channel obtained by Cover and El Gamal with slight difference due to no interference assumption at the receiver, includes the one relay rates of a two-level relay channel studied by Gupta and Kumar, using point-to-point coding, and includes the rates of two relay Aref network and other special two relay networks. This meets the max-flow min-cut upper bound under certain additional assumptions resulting in a certain capacity theorem, which includes the related previous capacities and is validated by its consistency with previous results relevant to special cases of broadcast channels. The theorems might be generalised to networks having more than two relays.

6 Acknowledgments

The authors would like to thank Prof. Rashvand and the anonymous reviewers for their helpful and invaluable comments. This work was supported in part by Iran National Science Foundation.

7 References

- [1] KRAMER G., BERRY R., EL GAMAL A., ET AL.: 'Special issue on models, theory, and codes for relaying and cooperation in communication networks', *IEEE Trans. Inf. Theory*, 2007, **53**, (10), pp. 3297–3301
- [2] KRAMER G., GASTPAR M., GUPTA P.: 'Cooperative strategies and capacity theorems for relay networks', *IEEE Trans. Inf. Theory*, 2005, **51**, (9), pp. 3037–3063
- [3] GUPTA P., KUMAR P.R.: 'The capacity of wireless networks', *IEEE Trans. Inf. Theory*, 2000, **46**, pp. 388–404
- [4] GUPTA P., KUMAR P.R.: 'Towards an information theory of large networks; an achievable rate region', *IEEE Trans. Inf. Theory*, 2003, **49**, (8), pp. 1877–1894
- [5] GROSSGLAUSER M., TSE D.N.: 'Mobility can increase the capacity of wireless networks'. IEEE INFOCOM 2001, Alaska, April 2001
- [6] GASTPAR M., VETTERLI M.: 'On the capacity of wireless networks; the relay case'. IEEE INFOCOM, 2002, pp. 1577–1586
- [7] EL GAMAL A., ET AL.: 'Energy-efficient scheduling of perfect transmission over wireless networks'. IEEE INFOCOM, 2002, pp. 1778–1782
- [8] TOUMPIS S., GOLDSMITH A.J.: 'Capacity regions for wireless ad hoc networks', *IEEE Trans. Wirel. Commun.*, 2003, **2**, (4), pp. 736–748
- [9] XIE L.-L., KUMAR P.R.: 'A network information theory for wireless communication: scaling laws and optimal operation', *IEEE Trans. Inf. Theory*, 2004, **50**, (5), pp. 748–767
- [10] XIE L.-L., KUMAR P.R.: 'On the path-loss attenuation regime for positive cost and linear scaling of transport capacity in wireless networks', *IEEE Trans. Inf. Theory*, 2006, **52**, (6), pp. 2313–2328
- [11] LANGBERG M., SPRINTOS A., BRUKE J.: 'The encoding complexity of network coding', *IEEE Trans. Inf. Theory*, 2006, **52**, (6), pp. 2386–2397
- [12] HARVEY N.J.A., KLEINBERG R., LEHMAN A.R.: 'On the capacity of information networks', *IEEE Trans. Inf. Theory*, 2006, **52**, (6), pp. 2345–2364
- [13] BORADE S., ZHENG L., GALLAGER R.: 'Amplify-and-forward in wireless networks: rate, diversity, and network size', *IEEE Trans. Inf. Theory*, 2007, **53**, (10), pp. 3302–3318
- [14] AREF M.R.: 'Information flow in relay networks'. Ph.D. Thesis, Stanford University, 1981
- [15] ABED HODTANI G.: 'Relay networks'. M.Sc. Thesis, Isfahan Univ. of Tech., Isfahan, Iran, 1987 (in Persian)
- [16] RATNAKAR N., KRAMER G.: 'The multicast capacity of acyclic, deterministic relay networks with no interference'. First Workshop on Network Coding, Theory and Applications, Riva de Garda, Italy, 7 April 2005
- [17] AVESIMEHR A.S., DIGGAVI S.N., TSE D.N.C.: 'Wireless network information flow'. Proc. Allerton Conference on Communications, Control and Computing, Illinois, 2007
- [18] AVESIMEHR A.S., DIGGAVI S.N., TSE D.N.C.: 'A deterministic approach to wireless relay networks'. Proc. Allerton Conference on Communications, Control and Computing, Illinois, 2007
- [19] AHLWEDE R., CAI N., LI S.-Y.R., YEUNG R.W.: 'Network information flow', *IEEE Trans. Inf. Theory*, 2000, **IT-46**, (4), pp. 1204–1216
- [20] GOWAIKAR R., DANA A.F., PALANKI R., HASSIBI B., EFFROS M.: 'On the capacity of wireless erasure networks'. Proc. ISIT, Chicago, 2004

- [21] COVER T., THOMAS J.: 'Elements of information theory' (Wiley, New York, 1991)
- [22] COVER T.M.: 'Broadcast channels', *IEEE Trans. Inf. Theory*, 1972, **18**, (1), pp. 2–14
- [23] BERGMANS P.P.: 'Random coding Theorems for broadcast channels with degraded components', *IEEE Trans. Inf. Theory*, 1973, **19**, (2), pp. 196–207
- [24] COVER T.M.: 'An achievable rate region for the broadcast channel', *IEEE Trans. Inf. Theory*, 1975, **21**, (4), pp. 399–404
- [25] COVER T.M., EL GAMAL A.: 'Capacity Theorems for the relay channel', *IEEE Trans. Inf. Theory*, 1979, **25**, (5), pp. 572–584
- [26] MARTON K.: 'A coding Theorem for the discrete memoryless broadcast channel', *IEEE Trans. Inf. Theory*, 1979, **25**, (3), pp. 306–310
- [27] EL GAMAL A., VAN DER MEULEN: 'A proof of Marton's coding theorem for the discrete memoryless broadcast channel', *IEEE Trans. Inf. Theory*, 1981, **27**, (1), pp. 120–122
- [28] COVER T.M.: 'Comments on broadcast channels', *IEEE Trans. Inf. Theory*, 1998, **44**, (6), pp. 2524–2530
- [29] COLEMAN T.P., MARTINIAN E., EFFROS M., MEDARD M.: 'Interference management via capacity-achieving codes for the deterministic broadcast channel'. Proc. IEEE ISOC ITW 2005 on Coding and Complexity, pp. 29–33
- [30] PINSKER M.: 'The capacity region of noiseless broadcast channels', *Prob. Inf. Transm.*, 1978, **14**, (2), pp. 97–102 (English Translation)
- [31] MARTON K.: 'The capacity region of deterministic broadcast channels' (ISIT, 1977)
- [32] XUE F., SANDHU S.: 'Cooperation in a half-duplex Gaussian diamond relay channel', *IEEE Trans. Inf. Theory*, 2007, **51**, (10), pp. 3806–3814
- [33] GELFAND S.I., PINSKER M.S.: 'Capacity of a broadcast channel with one deterministic component', *Probl. Pereda. Inf.*, 1980, **16**, (1), pp. 17–25
- [34] KORNER J., MARTON K.: 'General broadcast channels with degraded message sets', *IEEE Trans. Inf. Theory*, 1977, **23**, (1), pp. 60–64
- [35] EL GAMAL A., ZAHEDI S.: 'Capacity of a class of relay channels with orthogonal components', *IEEE Trans. Inf. Theory*, 2005, **51**, (3), pp. 1815–1817

[36] DABORA R., SERVETTO S.D.: 'Broadcast channels with cooperating decoders', *IEEE Trans. Inf. Theory*, 2006, **52**, (12), pp. 5438–5454

[37] LIANG Y., VEERAVALLI V.V.: 'Cooperative relay broadcast channels', *IEEE Trans. Inf. Theory*, 2007, **53**, (3), pp. 900–928

[38] EL GAMAL A., AREF M.: 'The capacity of semi-deterministic relay channel', *IEEE Trans. Inf. Theory*, 1982, **IT28**, (3), p. 576

8 Appendix: Decoding and probability of error analysis

(D-1) The first relay, knowing $s_{1,i}$ and upon receiving y_{01} , finds $\underline{u}_0: (\underline{u}_0, y_{01}) \in \mathcal{A}_e^n$ and then finds the bin of \underline{u}_0 that is, $\hat{w}_{01,i}$ and declares with small probability of error: $\hat{w}_{01,i} = \underline{w}_{01,i}$ iff n is sufficiently large and: [26, 28, 29]

$$R_{01} \leq I(U_0; Y_{01}|X_1) \quad (1a)$$

And the second relay, knowing $s_{2,i}$ and upon receiving y_{02} , finds $\underline{v}_0: (\underline{v}_0, y_{02}) \in \mathcal{A}_e^n$ and then finds the bin of \underline{v}_0 that is, $\hat{w}_{02,i}$ and declares with small probability of error: $\hat{w}_{02,i} = \underline{w}_{02,i}$ iff n is sufficiently large and

$$R_{02} < I(V_0; Y_{02}|X_2) \quad (1b)$$

And there are unique $(\hat{w}_{01,i}, \hat{w}_{02,i}) = (\underline{w}_{01,i}, \underline{w}_{02,i})$ iff

$$\begin{aligned} R_{01} + R_{02} &\leq I(U_0; Y_{01}|X_1) + I(V_0; Y_{02}|X_2) \\ &- I(U_0; V_0|X_1X_2) \stackrel{(A)}{=} H(U_0 V_0|X_1X_2) \\ &- H(U_0|X_1Y_{01}) - H(V_0|X_2Y_{02}) \end{aligned} \quad (1c)$$

(D-2) The second relay and the receiver act as two receivers for broadcasted \underline{x}_1 . The receiver, upon receiving y_{13} and finding $\underline{v}_1: (\underline{v}_1, y_{13}) \in \mathcal{A}_e^n$, and the bin of \underline{v}_1 , that is, $\hat{m}_{13,i}$, declares $\hat{m}_{13,i} = m_{13,i}(\hat{s}_{1,i} = \hat{s}_{1,i}, \hat{u}_{12,i} = u_{12,i})$ and the second relay, upon receiving y_{12} and finding $\underline{u}_1: (\underline{u}_1, y_{12}) \in \mathcal{A}_e^n$ and its bin number $\hat{m}_{12,i}$, declares $\hat{m}_{12,i} = m_{12,i}$, all with small probability of error iff n is sufficiently large and: [26, 28, 29]

$$R_{13} = R'_1 + \alpha(R_{12} + R_{21}) < I(V_1; Y_{13}), \quad \alpha \in [0, 1] \quad (2a)$$

$$R_{12} < I(U_1; Y_{12}) - I(U_1; V_1) \quad (2b)$$

(D-3) The first relay and the receiver act as two receivers for broadcasted \underline{x}_2 . The receiver, upon receiving y_{23} and finding $\underline{v}_2: (\underline{v}_2, y_{23}) \in \mathcal{A}_e^n$ and the bin of \underline{v}_2 , that is, $\hat{m}_{23,i}$, declares $\hat{m}_{23,i} = m_{23,i}(\hat{s}_{2,i} = \hat{s}_{2,i}, \hat{u}_{21,i} = u_{21,i})$ and the second relay, upon receiving y_{21} and finding $\underline{u}_2: (\underline{u}_2, y_{21}) \in \mathcal{A}_e^n$ and its bin number $\hat{m}_{21,i}$, declares $\hat{m}_{21,i} = m_{21,i}$, all with small

probability of error iff n is sufficiently large and: [26, 28, 29] (B-2)

$$R_{23} = R'_2 + \bar{\alpha}(R_{21} + R_{12}) < I(V_2; Y_{23}), \quad \bar{\alpha} = 1 - \alpha \quad (3a)$$

$$R_{21} < I(U_2; Y_{21}) - I(U_2; V_2) \quad (3b)$$

(D-4) The receiver, upon receiving y_{03} and having received (y_{13}, y_{23}) , found $\hat{u}_{12,i-1}, \hat{u}_{21,i-1}, \hat{s}_{1,i-1}, \hat{s}_{2,i-1}, \hat{m}_{12,i-1}, \hat{m}_{21,i-1}$ and hence knowing $\hat{s}_{1,i-1}, \hat{s}_{2,i-1}$, finds jointly typical pair $(u_0, v_0) \in L(y_{03,i-2}, y_{13,i-2}, y_{23,i-2}) \cap (A_1 \times B_1) \cap A_e^n(U_0 V_0 | X_1 X_2)$ and then $(\hat{w}_{01,i-2}, \hat{w}_{02,i-2})$ with small probability of error iff n is sufficiently large and (see random partition)

$$\hat{R} < R_{01} + R_{02} + I(U_0 V_0; Y_{03} Y_{13} Y_{23} | X_1 X_2) \quad (4)$$

where

$$L(y_{03,i-2}, y_{13,i-2}, y_{23,i-2}) = \{(u_0, v_0) : (u_0, v_0, x_1, x_2, y_{03}, y_{13}, y_{23}) \in A_e^n\}, A_1 = \{u_0 : u_0 \in S_{1, \hat{s}_{1,i-1}} \cap S_{12, \hat{m}_{12,i-1}} \cap A_e^n(U_0 | X_1 X_2)\}, B_1 = \{v_0 : v_0 \in S_{2, \hat{s}_{2,i-1}} \cap S_{21, \hat{m}_{21,i-1}} \cap A_e^n(V_0 | X_1 X_2)\}$$

(D-5) The receiver, upon receiving y_{03} and having found jointly typical pair (u_0, v_0) or $(\hat{w}_{01,i-2}, \hat{w}_{02,i-2})$ and knowing $(x_1, x_2), (y_{13}, y_{23})$ finds x_0 such that $(x_0, y_{03}, y_{13}, y_{23}, x_1, x_2, u_0, v_0) \in A_e^n$ and declares $\hat{w}_{03,i-2} = w_{03,i-2}$ with small probability of error iff n is sufficiently large and

$$R_{03} < I(X_0; Y_{03} Y_{13} Y_{23} | X_1 X_2 U_0 V_0) \quad (5)$$

Now, we are able to find bounds on the total rate R for the message $w = (w_{01}, w_{02}, w_{03})$. From code construction and (G-3) in codebook generation, we have

$$R = \underbrace{R_{01} + R_{02}} + R_{03} < R' + R_{03} \quad (6)$$

$$(4, 5, 6) \Rightarrow R < \underbrace{R_{01} + R_{02}} + H(Y_{03} Y_{13} Y_{23} | X_1 X_2) - H(Y_{03} Y_{13} Y_{23} | X_0 X_1 X_2) \quad (7)$$

(B-1)

$$(2a) + (3a) \Rightarrow R'_1 + R_{12} + R'_2 + R_{21} < I(V_1; Y_{13}) + I(V_2; Y_{23}), 0 < \alpha < 1 \quad (8)$$

$$R'_1 + R_{12} = \underbrace{R'_1 + \alpha R_{12}} + \underbrace{\bar{\alpha} R_{12}} < I(V_1; Y_{13}) + I(U_1; Y_{12}) - I(U_1; V_1), \alpha = 0 \quad (9a)$$

$$R'_2 + R_{21} = \underbrace{R'_2 + \alpha R_{21}} + \underbrace{\bar{\alpha} R_{21}} < I(V_2; Y_{23}) + I(U_2; Y_{21}) - I(U_2; V_2), \alpha = 1 \quad (9b)$$

(B-3) From random coding and random partitioning, we have

$$R'_1 + R_{12} = R_{01} \quad (10a)$$

$$R'_2 + R_{21} = R_{02} \quad (10b)$$

$$R' = H(U_0 V_0 | X_1 X_2) - H(U_0 | X_1 Y_{01}) - H(V_0 | X_2 Y_{02}) \quad (10c)$$

(B-4)

$$R \stackrel{(7),(1,10a),(9b)}{<} I(U_0; Y_{01} | X_1) + I(V_2; Y_{23}) + I(U_2; Y_{21}) - I(U_2; V_2) + H(Y_{03} Y_{13} Y_{23} | X_1 X_2) - H(Y_{03} Y_{13} Y_{23} | X_0 X_1 X_2) = R_{c1}^* \quad (11a)$$

and

$$R \stackrel{(7),(1,10b),(9a)}{<} I(V_0; Y_{02} | X_2) + I(V_1; Y_{13}) + I(U_1; Y_{12}) - I(U_1; V_1) + H(Y_{03} Y_{13} Y_{23} | X_1 X_2) - H(Y_{03} Y_{13} Y_{23} | X_0 X_1 X_2) = R_{c2}^* \quad (11b)$$

and

$$R \stackrel{(7),(8)}{<} I(V_1; Y_{13}) + I(V_2; Y_{23}) + H(Y_{03} Y_{13} Y_{23} | X_1 X_2) - H(Y_{03} Y_{13} Y_{23} | X_0 X_1 X_2) = R_{c3}^* \quad (11c)$$

$$R \stackrel{(5),(10c)}{<} H(Y_{03} Y_{13} Y_{23} V_0 U_0 | X_1 X_2) - H(Y_{03} Y_{13} Y_{23} | X_0 X_1 X_2) - H(U_0 | X_1 Y_{01}) - H(V_0 | X_2 Y_{02}) = R_{c4}^* \quad (11d)$$

We know that the average probability of error is small arbitrarily \Leftrightarrow decoding steps (D-1)–(D-5) and the corresponding bounds are satisfied \Rightarrow the bounds (11a–d) are satisfied, or equivalently.

At least one of the bounds (11a–d) is not satisfied \Rightarrow at least one of the decoding steps is not satisfied \Leftrightarrow the average probability of error is not small arbitrarily.

So, the bounds (11a–d) complete the proof of the main theorem. \square